



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	LED head cable through the slot	2026-10-02	AC

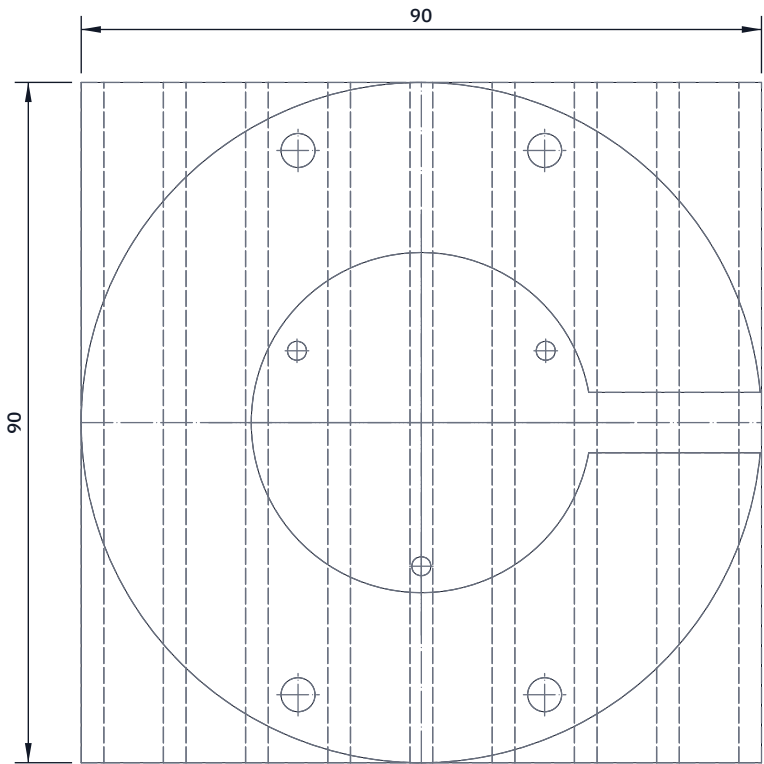


TOP VIEW

Scale 1:1; looking down (along -Z)

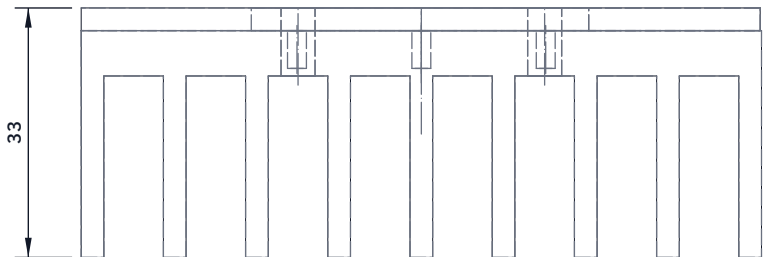


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

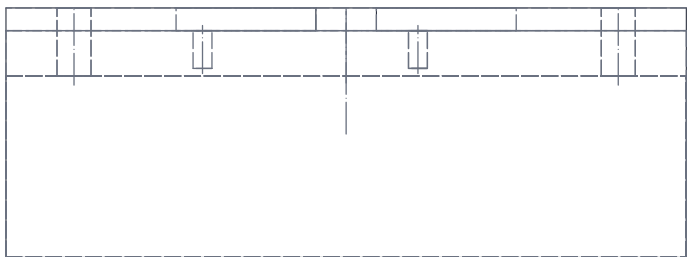

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

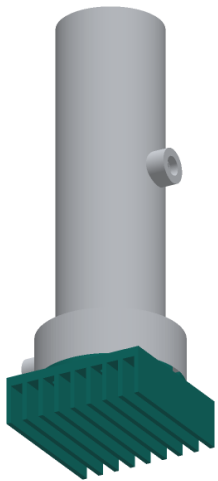

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Sink: bought, 90 x 90 x 30, nine fins hanging down, 6 mm base.

Fins run front to back. Drill four 4.5 mm holes through the base in the second fin gap each side, 16.3 from the centre across and 36 front and back. Spot face for the screw heads.

Three M3 tapped holes (drill 2.5) 5 deep on a 38 dia circle at 30, 150 and 270 deg for the LED board.

Ring: cut 90 outside, 45 inside dia from 3 mm aluminium; an 8 mm wide slot from the hole to the edge on the right side (toward the enclosure) for the LED cable; drill four 4.5 mm holes matching the sink. Deburr.

Fit: thermal pad, ring on the sink base, LED board in the ring's hole, its flat cable out through the slot; the stack bolts to the cap with four M4 x 16 screws.

Check: ring and board tops level within 0.1 mm.

LUMAFLOW

github.com/BoujeeEnjinia1701/lumaflow

LumaFlow heat sink and spreader ring: drilling and making sketch

DRAWING NO.

LMF-DWG-105

REV

P2

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:1

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

Bought aluminium finned sink 90 x 90 x 30; ring from 3 mm aluminium plate